


## Hand Held Dot-Peen

This dot-peen marking system is **compact and portable**. The marking window is 2.36" x 1.18" and the marking speed is 3 (1/8") characters per second. The system controller offers the flexibility of DC start and mark complete signals, as well as serial and digital I/O communication.

- Integrated cycle start button in the handle
- System is available with pneumatic or electric dot-peen
- Custom part locating stand-off provided upon request

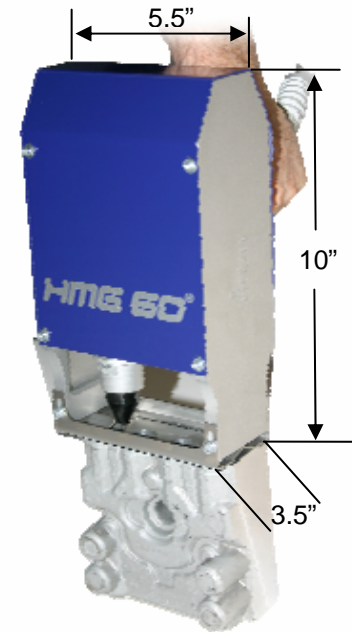

### Hand Held Marker How to Order

**To Order:** Select only the symbols that represent the marker feature that is needed. Place that symbol in the sequence as shown.

Model/Feature	Symbol	Example
Hand Held Marker	HMG60	HMG60-P-25
Electric	-	
Pneumatic	P	
10 ft Cable	-	
25 ft Cable	25	

#### Optional Software for PC

Signumeric Software	HMGSOFT
---------------------	---------

#### Utilities:

- Electrical components require 110 VAC power, 9 ft electrical cord supplied
- Air power required for pneumatic dot-peen\*
  - 8mm Push-in tube fitting requires connection to air supply (30-75 PSI operating range)

\*This feature is not included with electrically powered unit

#### Features:

- Marking window: 2.36" x 1.18" (60 x 30 mm)
- Marking speed: 3 (1/8") characters per second
- Electrical cycle start trigger
- Locating arms
- Industrial controller
- LCD screen with simple menu commands
- Removable keyboard provided for programming
- 10 or 25 ft cable to connect marking head to controller
- Carbide pin included - Marks plastic, wood and metals (up to 50 RC)
- Weight of marking head: 6.8 lbs
- Machine size: 10" x 5.5" x 3.5"